


Typ 202-MKS

FLACHKOPF

Sechskantschaft, offen
(dadurch verdrehgesichert)

Werkstoff: Stahl
verzinkt und chromatiert
(andere Oberflächenbeschichtungen möglich, bitte anfragen)

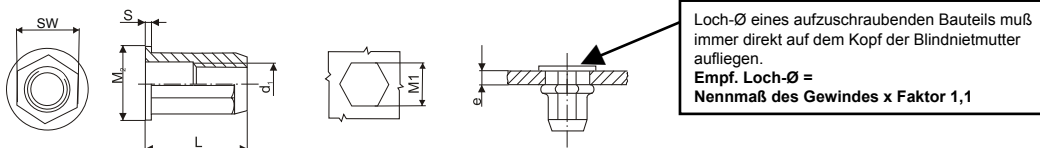

Gewinde- bezeichnung	Klemmbereich e	empf. SW des Aufnahmelochs M ₁ ¹⁾	SW	M ₂	S	L	3B-Artikel- bezeichnung
M4	0,5 - 2,0	6,0	5,9	9,0	1,0	11,0	M4-202-MKS-200
M5	0,5 - 3,0	7,0	6,9	10,0	1,0	14,0	M5-202-MKS-300
M6	0,5 - 3,0	9,0	8,9	13,0	1,5	16,0	M6-202-MKS-300
	3,0 - 5,5					18,0	M6-202-MKS-550
M8	0,5 - 3,0	11,0	10,9	16,0	1,5	18,0	M8-202-MKS-300
	3,0 - 5,5					20,5	M8-202-MKS-550
M10	0,5 - 3,0	12,1	12,0	18,0	1,7	20,0	M10-202-MKS-300
	1,0 - 3,5					23,0	M10-202-MKS-353
M12	1,0 - 4,0	16,1	16,0	23,0	2,0	27,0	M12-202-MKS-400

¹⁾ Idealwert für Aufnahmeloch: M₁ = M + 0,1